

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 19 TOWNSHIP 16 RANGE 3

DATE: -6-9-02- 11-13-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison Fd


METHOD OF ESTABLISHMENT: County: 8-5-97

IN. S.P.C. E ZONE NAD '83


NAME: 16031905

N: 507314.7394(m)

E: 50508.1411(m)

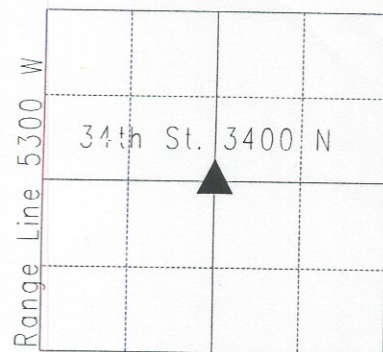

THIS CORNER POSITION REPRESENTS A "TITLE" CORNER AND MAY NOT NECESSARILY REPRESENT THE POSITION BASED ON RECORD CORNERS.

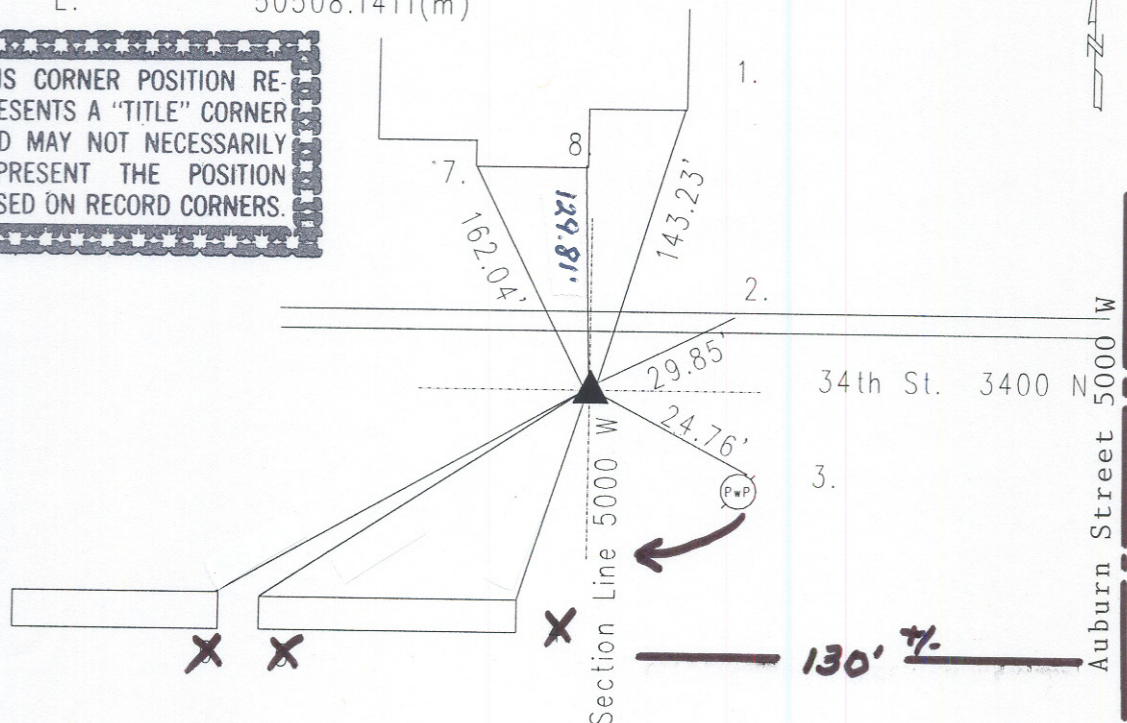

A survey by Hosbrook 10-28-1850 called no stone nor witness per Wayne Township Legal Survey Book pg. 35. Monroe 5-2-60 called a railroad spike. G.W.S. 12-3-62 called a cut 'x' in concrete. Miller 11-25-75 called a PK nail over cut 'x'. McCarthy 8-14-86 called same. Kiste 8-7-96 called a PK nail over a cut 'x'. Wilcoxon 8-5-97 called PK nail found 6" down. Cut 'x' in concrete fd 12" down. Harrison set. Re-tied 6-9-02 by Wilcoxon.

16031905

REF.	DISTANCE	DESCRIPTION
1.	143.23'	SE corner of brick : School #79 5002 W. 34th Street
2.	29.85'	Cut 'x' on curb
3.	24.76'	Mag nail w/brass washer E PwP#13-426 A 4"up
4.	80.23'	NE corner of frame for ADDRESS 5009
5.	96.65'	NE corner of frame for ADDRESS 5017
6.	162.04'	Southwesterly corner of School #79
7.	129.90'	Southeasterly corner of School #79
8.	129.81'	Corner of School #79